

Amrapali Sapphire Phase-2 AOA

Sector-45, Noida
Sports Committee

TENDER ENQUIRY FOR FENCING OF BASKETBALL COURT


Subject: Invitation for Quotation for Supply, Fabrication and Installation of Basketball Court Fencing

Dear Sir/Madam,

You are invited to submit your lowest competitive quotation for the **supply, fabrication and installation of MS framed GI mesh fencing** for a basketball court as per the following details.

1. Court Dimensions (Approx.)

- Total perimeter approx. (239 feet)

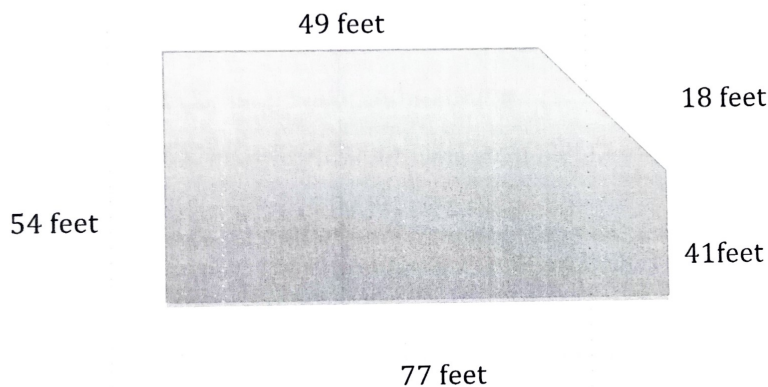


2. Scope of Work

The contractor shall supply all materials, labour, tools and equipment required for complete installation of the fencing.

3. Technical Specifications

- **Fence Height:** 10 feet
- **Main Posts:** MS Square Hollow Section (SHS) 3" x 3", suitable wall thickness (minimum 3 mm), embedded in PCC concrete foundation.
- **Horizontal Beams:**
 - Top beam
 - Middle beam



- Bottom beam
- Material: MS square/rectangular tube of suitable size (minimum 2" x 2" or equivalent).
- **Mesh:** Heavy-duty GI chain link mesh of suitable gauge (minimum 8 SWG / 10 gauge or equivalent), securely fixed to the MS frame.
- All MS members shall be properly welded, cleaned, rust-treated, primed and painted with two coats of synthetic enamel paint
- All necessary clamps, brackets, nuts, bolts, welding, excavation, PCC foundations, grouting and finishing shall be included.

4. Quantity

Complete fencing around the basketball court as per the attached drawing.

5. Contractor to Quote

- Supply, Fabrication and installation of all materials.
- Civil foundation works.
- Surface preparation, primer and painting.
- Transportation, loading/unloading and all incidental charges.
- GST and other applicable taxes.


6. Completion Period

The work shall be completed within **7 DAYS** the date of issue of the work order.

7. Warranty

Minimum **12 months** against manufacturing defects and workmanship.

Yes

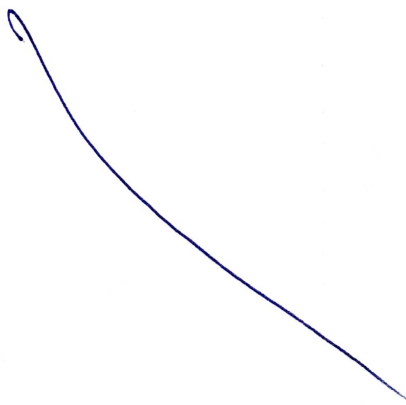

8. Submission

Bill of Quantities (BOQ)

S.No	Description of Work	Unit	Qty	Rate (INR)	Amount (INR)
1	MS fencing 10 Feet height 3inch x 3 inch -Main Poles Type B to be placed every 10 feet Connecting Poles and Beams Top, bottom and center 2-inch x 2-inch Type B Paint 1 layer MS primer 2-layer MS paint	Lot	1		
4	Fencing Mesh – GI, 3mm, 2inch x 2 inches Paint – 1 layer MS primer 2-layer MS paint	Lot	1		
7	Transportation				

General Terms and Conditions

- Contractors are advised to inspect the site before submitting their quotation.
- The quoted rates must include all labour, materials, equipment, transportation, and applicable taxes.
- The work should be completed within 5 days from the date of issue of the work order.
- Payment will be released after inspection and approval by the Sports Committee / AOA.
- The contractor shall be responsible for the safety of materials and existing infrastructure during the execution of the work.
- BOM reserves the right to cancel this tender anytime without providing any reason / justification.

Submission Details

Maintenance Office
Amrapali Sapphire Phase-2
Sector-45, Noida



Last Date for Submission: 18 July 2026

Tender Opening Date: 19 July 2026